


Collared Eyebolt Metric Thread – EBCM

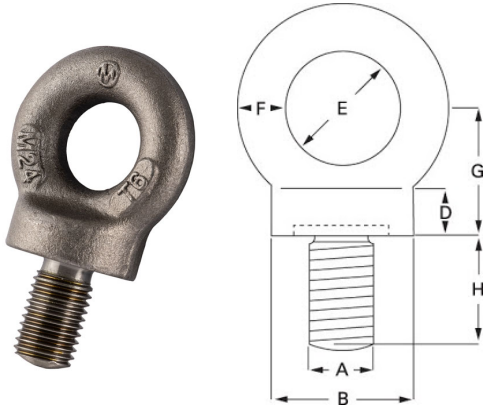

- Drop forged, high tensile steel, heat treated.
- Self colour and electro galvanised finish.
- Meets the W.L.L. performance requirements of BS 4278.
- Minimum breaking load is 5 times the W.L.L.
- Marked with CE, W.L.L, size and product ID mark.
- For further clarification on reductions for non-axial loading, please consult GT Lifting.
- Certs available **2.1** **DoC**

Product Code	Product Code	W.L.L.	A	B	D	E	F	G	H	Weight
Self Colour	Electro Galvanised	t	mm	mm	mm	mm	mm	mm	mm	kgs
EBCM6	EGEBCM6	0.1	6	22	7	15	9	20	18	0.06
EBCM8	EGEBCM8	0.15	8	22	7	15	9	20	19.5	0.06
EBCM10	EGEBCM10	0.33	10	22	7	15	9	20	19.5	0.06
EBCM12	EGEBCM12	0.4	12	22	7	15	9	20	19.5	0.06
EBCM14	EGEBCM14	0.5	14	29	10	20	12	26	23	0.15

Product Code	Product Code	W.L.L.	A	B	D	E	F	G	H	Weight
Self Colour	Electro Galvanised	t	mm	mm	mm	mm	mm	mm	mm	kgs
EBCM16	EGEBCM16	0.8	16	29	10	20	12	26	24.5	0.15
EBCM18	EGEBCM18	1.2	18	40	14	27	16	36	29.5	0.27
EBCM20	EGEBCM20	1.6	20	40	14	27	16	36	33.5	0.3
EBCM22	EGEBCM22	1.6	22	45	14	30	17	41	35	0.54
EBCM24	EGEBCM24	2.5	24	52	17	35	21	46	41.5	0.85
EBCM27	EGEBCM27	2.5	27	58	20	39	23	51.5	46	1.13
EBCM30	EGEBCM30	4	30	65	22	44	26	58	51	1.62
EBCM33	EGEBCM33	4	33	72	24	48	29	64	56	2.37
EBCM36	EGEBCM36	6.3	36	81	27	54	32	72	63	3.12
EBCM42	EGEBCM42	8	42	101	30	68	40	90	79	6
EBCM48	EGEBCM48	10	48	101	34	68	40	90	79	9
EBCM52	EGEBCM52	12.5	52	115	38	76	46	102	89	10
EBCM56	EGEBCM56	16	56	128	43	86	51	114	100	13
EBCM64	EGEBCM64	20	64	144	48	96	58	128	112	17.5
EBCM72	EGEBCM72	25	72	162	54	108	65	144	126	31